

*Liebert NX - Next Generation UPS
for protecting your Business Critical Systems*





Next Generation UPS for new levels of modern equipment protection

Today's advanced digital computing, communications, process control and medical systems require power protection that is just as innovative. These systems, however, face many of the traditional threats to their availability - foremost among them is a lack of high quality power required to operate sensitive electronics.

Emerson Network Power goal is solving these challenges with a power solution that combines high performance, compact size, reliability and cost-efficiency. Emerson Network Power Liebert NX is the Next Generation of true-online, double conversion digital UPS. Designed to meet the high availability power needs of a wide

variety of applications, the Liebert NX combines innovation and simplicity and low cost of ownership. The result is a power system that delivers both reliability and a return on investment beyond what has been traditionally offered.

The Liebert NX An Outstanding Performer

The system's advanced true-online, double conversion topology features a digital signal processor (DSP) controlled IGBT rectifier and a digital signal processor (DSP) controlled IGBT inverter.

DSP Power Factor Corrected IGBT Rectifier

The rectifier provides ≥ 0.99 Input Power Factor (PF), less than 3% of Input Current Total Harmonic Distortion (THDi) and the widest input voltage window and frequency tolerances.

0.99 Power Factor ensures maximization of active power leading to reduced electricity usage, minimization of cables and backup

generator sizing requirements leading to reduced investment costs.


Low input current THDi enables avoiding damage to other loads connected to the upstream power distribution bus. Wide input voltage window and frequency tolerances contribute to higher system availability by minimizing battery usage.

DSP Controlled IGBT inverter

Advanced inverter control technology provides the highest output power quality, ensuring very low output voltage THD and superior waveform to protect connected loads.

It operates under a wide variety of conditions, handling 100% non-linear loads with 3:1 crest factor, as well as 100% unbalanced loading.

The inverter control enables Liebert NX to be suitable for the widest ranges of loads required by the market; delivering full active power rated kW up to 0.9 leading PF loads.

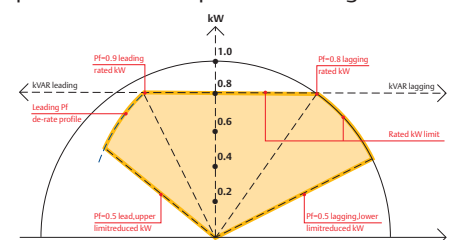



True On-line Double Conversion Only a double-conversion topology provides 100% protection with complete input to output isolation and totally regenerated power. A double-conversion UPS delivers 100% power conditioning, zero transfer time to battery, great stability of output voltage and frequency and better transient suppression than line-interactive units. Double-conversion systems also offer a wider input voltage window that allows the UPS to absorb deeper sags without having to transfer to battery.

DSP Control Fully digital control technology provides a highly accurate, drift-proof control compared to traditional analog electronics. These features enable the UPS to provide accurate, reliable power protection under a wide range of conditions.



Extended Load Ranges Modern Data Centers, Blade Servers, and IT applications in general, need more active power. Moreover In some instances, new Data Centers have capacitive, or leading, features, while traditional systems had inductive power factors, also known as lagging.

Leading Power Factor exists when capacitive circuits prevail over inductive circuits. In this case, current is said to be "leading", because its curve on a 2D chart is phase-shifted ahead of the voltage curve. UPS must be able to work according to real load requirements. While in the past 0.7-0.8 Power Factor was common for IT applications, today computers' PF is getting closer to 1.



The best investment you can make in a UPS system: Reliability, Efficiency and Value in a compact package.

How can I get the Highest levels of Protection and Availability?

- The Liebert NX gives you built-in reliability with redundant power supply cards, highly efficient stratified cooling of critical components and optional redundant cooling fans.
- Wider input voltage and frequency tolerances contribute to high power availability.
- Digital controls provide the fastest possible power management to enhance reliability, accuracy and efficiency while reducing component count.
- Dual bus compatibility and system redundancy further enhance the availability of power.
- High overload protection handles 110% overload for 60 minutes, 125% for 10 minutes, and 150% for 1 minute.

How can I save on my electricity bill and investment costs?

- The improved input power factor of the Liebert NX can actually reduce your electricity usage.
- It delivers the highest possible input power factor - greater than 0.99 at rated linear and non-linear loads - for maximum efficiency.

- The unique ability of the Liebert NX to adjust power walk-in from 5 seconds to 30 seconds, along with reduced input current distortion and power factor correction, also enables you to save money by reducing back-up generator sizing requirement.
- The unit's compact footprint requires less floor space, leaving you with more room for other equipment.
- Liebert NX has built in Parallel and Load Bus Synchronization (LBS) boards, no extra hardware is needed, it may be easily parallelized just with parallel cables.

How can I satisfy the requirements of the latest generation servers?

- Liebert NX is capable of driving wide ranges of loads, from 0.5 lagging to 0.9 leading; this feature makes the UPS able to follow the latest IT industry trends, with more active power available for all kind of loads.

How can I protect also my upstream-connected devices?

- The Liebert NX provides the cleanest level of upstream power with the lowest level of input current THDi in the industry.

- This ensures that clean power flows upstream, avoiding damage to other loads connected to the upstream power distribution bus.

How can I extend the system when I need more power?

- Liebert NX features easy and simple scalability and redundancy, in fact up to six Liebert NX modules may be paralleled in a redundant configuration for added reliability and serviceability.
- The Liebert NX is compatible with Liebert's unique LSB.

How can I protect and extend the life of my batteries?

- Liebert NX minimizes transfers to batteries thanks to its wide input voltage tolerance down to 305 V.
- Temperature-compensated battery charging extends battery life.

How can I ensure the UPS will work under the most severe conditions?

- The wide input voltage window of +10 to -20% and a frequency tolerance of 40Hz to 70Hz provide high quality power, even when input parameters are below standard. This helps to minimize transfer



Configurations A Full Range Of Features To Meet All Your Power Availability Needs

Single Or Dual Input Operation

Your Liebert NX power system can be utilized with either single or dual power inputs. The dual power feature allows you to take advantage of a secondary power source. An optional wrap-around maintenance bypass is also offered for the single input configuration.

to battery, reducing the charging and discharging cycles.

- Back-feed protection sensing ensures system integrity.
- Short-circuit-proof, DSP controlled inverter provides highest output power quality.

How can I easily maintain my UPS?

- Liebert NX includes a built-in maintenance bypass, optional wraparound maintenance bypass with IP 20 UPS enclosure protection - even with the front doors open.
- Redundant configuration allows you to utilize one module while the other is being serviced.
- Dual bus compatibility enables you to transfer the load to an alternate power source for maintenance activities.

How can I monitor and communicate with my UPS?

- To meet a variety of needs, the Liebert NX can provide power simultaneous communications through a Relay Contact Card, OpenComms™ Web Card and MODbus J-Bus Card and MultiLink™ shutdown software.

How can I check my UPS status?


- The Liebert NX features easy access for

service thanks to front accessibility of critical components, self-diagnostics and various monitoring options.

- Large and user-friendly LCD display provides operating information in twelve different languages.

How can I satisfy my particular installation needs?

- Flexibility is achieved through many choices including type of battery, number of single and multi-unit configurations, and an array of internal and external power and communication options.
- Auto restart capability provides added availability.
- Ultra-quiet performance with noise levels below 54dB allows greater latitude in where to place the unit.
- Adjustable power walk-in, numerous user-specified settings, a choice of power monitoring communications alternatives and user friendly control are all handled through the menu-driven LCD control panel with detailed data reporting.
- Emerson Network Power is recognized to be a great solution provider. Please contact your local Emerson Network Power office or Liebert representative to receive special solution consultancy.

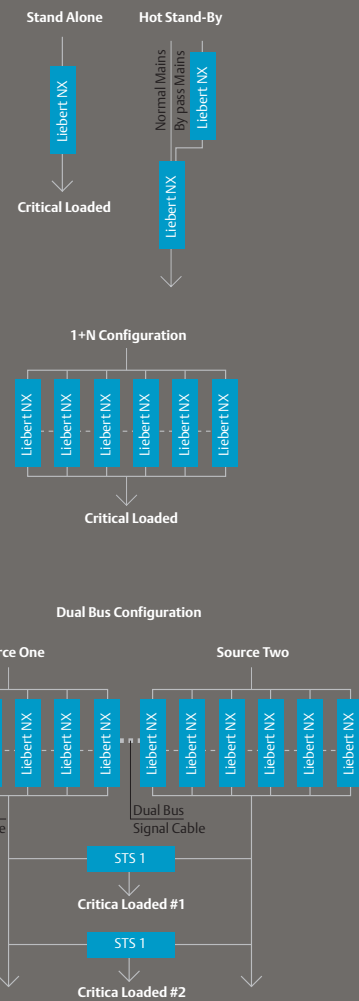

Advanced Monitoring and Communications Capabilities Keep You in Control

Communications Options

The Liebert NX includes three Intellislot™ ports designed to house multiple electronic cards for a variety of monitoring and communication applications. These optional cards include:

OpenComms™ Web Card - to meet the needs of network managers by providing interface to network management systems.

Relay Contact Card - addresses the basic monitoring and communications needs of users/maintenance personnel.

OpenComms™ MODbus-Jbus Card - to interface with advanced Building Management Systems for facility monitoring.

Other Remote Communications

The Liebert NX provides other communications alternatives through RS-232 & RS-485 ports.

In addition to remote communications, service personnel can also use the RS-232 port for local downloading of data, while the RS-485 port can be utilized for a variety of remote communications application.



Local Communications

Liebert NX provides excellent local communications through its LED-based mimic diagram and LCD panel.

While the mimic shows the live power path, the back-lit contrast-adjusting LCD provides you with detailed data on the unit and the system in twelve different languages through a user-friendly menu.

Liebert Power Monitoring Capabilities:

- MultiLink™ Automated System Shutdown Software
- OpenComms(tm) Nform Monitoring System
- SiteScan(tm) Web Comprehensive
- Remote Power Monitor Panels
- Third-Party Monitoring Systems

Emerson Network Power Service



Emerson Network Power Service offers a wide variety of services and maintenance programs designed to keep your mission critical equipments operating continuously and smoothly. Our aim is to design and offer an overall service package to meet customer's needs from a technical and commercial point of view.

More and more organizations around the world trust Emerson Network Power Service to minimize critical systems emergencies and interruptions. We're backed by the largest

technical support and customer response organization in the industry with factory-trained customer engineers and service professionals in more than 100 service centers ready to assist in maintaining your uptime, 24 hours a day, every day of the year. Emerson Network Power Service can provide service capability for your entire business critical infrastructure: from AC and DC power systems, to battery systems, commutation systems and environmental and site monitoring services.



Technical Characteris

Models	Nxe								Nxa				
Rated Power @ 0.8 PF [kVA]	10	15	20	30	40	60	80	100	120	140	160	200	
Rectifier Input													
Rectifier Type	IGBT-based Vector Controlled PFC (PF Corrected)												
Input Voltage [Vac]	380 / 400 / 415 (Accepted from 305 to 477 without batt. Use)												
Input Frequency [Hz]	50 or 60 (Accepted range from 40 to 70)												
Input Current THD	<3% (without any Filter)												
Input Power Factor	≥ 0.99 (without any Filter)												
Power Walk-In [s]	5 to 30 (selectable)												
Bypass Input													
Input Voltage [Vac]	380 / 400 / 415												
Battery													
Battery Type	VRLA (Valve Regulated Lead Acid) or Wet / Flooded or NiCd												
End-Cell Voltage [Vdc/Cell]	Selectable from 1.60 to 1.90 (for VRLA)												
DC Ripple Current (float)	<5% (of C10 AH capacity) RMS value												
DC Ripple Voltage (float & const V Ch)	<1% (RMS value)												
Temp. Comp. Charge	Standard (where internal batteries 10, 15, 20, 30, 40 kVA) and Optional (for all other battery configurations)												
Output													
Inverter Type	IGBT-based Vector, Repetitive & PI Controlled												
Output Power [kW]	8	12	16	24	32	48	64	80	96	112	128	160	
Output Voltage [Vac]	380 / 400 / 415 +/- 0.5 Regulation (3-phase RMS average)												
Output Frequency [Hz]	50 or 60 with +/- 0.05 Regulation												
Output Voltage THD	1% (max)												
Max. Load Crest Factor	3:1 (compliant with IEC 62040-3)												
Transient Volt. Resp. [ms]	10 to recover ± 5% of Nominal Voltage for 0% to 100% or 100% to 0% step load												
Max. Leading PF Load	Up to 0.9												
Voltage Displacement [°el]	120° +/- 10 el (with 100% unbalanced load)												
Overload	110% for 60 minutes, 125% for 10 minutes, 150% for 1 minute												
Efficiency													
AC-AC	up to 96												
Physical Parameters													
Width [mm]	600			600				700		1000			
Depth [mm]	700			825				825		825			
Height [mm]	1400			1600				1800		1800			
Weight (approx.)													
without batt. [kg]	180	204	204	312	341	401	445	720	720	1050	1200	1350	
UPS Enclosure IP	IP 20 (even with open front door)												
Standards													
	IEC 62040-3, IEC 62040-2, IEC 62040-1-1, IEC 60146-1-1, IEC 61000-4-2, 4, 5, 6, 8, 11, EN 50091-1-1, EN 50091-2, EN 50091-3, EN 60950, EN 60529, ANSI C62.41 (IEEE 587)												
EMC Class	Class-A (Applicable for both Radiated & Conducted)												
Environmental													
Storage Temp. [°C]	-20 to 70 (UPS) & -20 to 30 (Battery)												
Operating Temp. [°C]	0 to 40 (UPS) & 25 +/- 5 (Battery)												
Relative Humidity	0 to 95% (non-condensing)												
Maximum Altitude above Mean Sea Level [m]	1000 (as per IEC 62040/3)												

Liebert NX comes in 10 popular ratings: 10, 15, 20, 30, 40, 60, 80, 100, 120, 140, 160, 200 kVA (400V, 50/60 Hz). All these UPS's are of identical look, and declined in 4 different dimensions.

Liebert NX 10 to 40 kVA is designed to house optional battery bank within the UPS cabinet for a specified run time.

A complete range of external cabinets is available for all Liebert NX: battery cabinets, transformer cabinets, and maintenance bypass cabinets.

Emerson Network Power

1050 Dearborn Drive P.O. Box 29186 Columbus, Ohio 43229
 T: 614-8880246 F: 614-8416022
 T: 800-8779222 (US and Canada Only)

Emerson Network Power Asia Pacific Headquarters

7/F, Dah Sing Financial Centre, 108 Gloucester Road
 Wanchai, Hong Kong
 T: 852-25722201 F: 852-28310114

Country Offices**Emerson Network Power (Australia) Pty Ltd**

Block P, Regents Park Estate, 391 Park Road, Regents
 Park, Sydney, NSW 2143, Australia
 T: 61-1300367686 F: 61-2-97438737

Emerson Network Power (China) Ltd

No.1 Kefa Road, Science & Industry Park, Nanshan
 District, Shenzhen 518057, China
 T: 86-755-86010808 F: 86-755-86010909

Emerson Network Power (Hong Kong) Ltd

7/F, Dah Sing Financial Centre, 108 Gloucester Road,
 Wanchai, Hong Kong
 T: 852-25722201 F: 852-28310114

Emerson Network Power (India) Private Ltd

Plot No. C-20, Road No. 19, Wagle Industrial
 Estate, Thane (West), Maharashtra 400604, India
 T: 91-22-25807000 / 2388 F: 91-22-25828358

Emerson Network Power (Indonesia), c/o PT Emerson Indonesia

Wisma Pondok Indah 1st Floor, Jl. Sultan Iskandar
 Muda V TA, Jakarta 12310, Indonesia
 T: 62-21-7507800 F: 62-21-7507899

Emerson Network Power Division / Emerson Japan Ltd

New Pier Takeshiba, South Tower 7F, 1-16-1
 Kaigan, Minato-ku, Tokyo 105-0022, Japan
 T: 81-3-54038594 F: 81-3-54032924

Emerson Network Power (Korea)

8th Fl. HongIk University KangNamArt Center, 51-12
 Banpo-Dong, Seocho-Gu, Seoul 137-044, Korea
 T: 82-2-34831500 F: 82-2-5927883

Emerson Network Power (Malaysia) Sdn Bhd

Wisma Glomac 3, Block C, 6th Floor, Jalan SS 7/19,
 Kelana Jaya, 47301 Petaling Jaya, Selangor Darul Ehsan, Malaysia
 T: 603-7884 5000 F: 603-7884 5188

Emerson Network Power (New Zealand)

Unit 2, 75 Blenheim Road, Christchurch New Zealand
 T: 64-3-3430235 F: 64-3-3430250

Emerson Network Power (Philippines), Inc.

3/F, King's Court 1 Building, 2129 Chino Roces
 Avenue, Makati City 1200, Philippines
 T: 63-2-8934177 / 178 F: 63-2-8112027

Emerson Network Power (Singapore) Pte Ltd

27 International Business Park
 # 03-01 Primefield-Landmark Building Singapore 609924
 T: 65-64672211 F: 65-64670130

Emerson Network Power (Taiwan) Ltd

11F, 141 Jen Ai Road, Section 3, Taipei 106, Taiwan, R.O.C.
 T: 886-2-87713655 F: 886-2-87717297

Emerson Network Power (Thailand) Co Ltd

123 Suntowers Bldg.-B, 22nd Fl, Vibhavadi-Rangsit
 Road, Ladyao, Chatuchak, Bangkok 10900, Thailand
 T: 66-2-6178260 F: 66-2-6178277 / 278
 T: 218 Doi Can Street, Hanoi, Vietnam F: 84-4-762 8909

Countries covered by our Asia Network include:

Bangladesh, Sri Lanka, Nepal, Pakistan, Vietnam, Laos, Seychelles,
 Cambodia, Brunei, Papua New Guinea, Fiji

Emerson Network Power.

The global leader in enabling business-critical continuity.

emersonnetworkpower.com

- AC Power Systems
- Embedded Power
- Outside Plant
- Connectivity
- Inbound Power
- Precision Cooling
- DC Power Systems
- Integrated Cabinet Solutions
- Site Monitoring and Services